

Metal Paper Corner Tape

Description


The metal paper corner tape is ideal to protect the corners formed by the union of 2 gypsum boards at interior work, creating finishes of an excellent quality quickly and easily, without requiring any fixing element such as beads or nails.

Characteristics

The metal paper corner tape is manufactured with high quality raw materials, resistant paper that complies with the ASTM C 475 standard, as well as galvanized steel strips that provide excellent resistance to corrosion, resulting in a corner tape with good adhesion, crack resistant and easy to install.

Physical characteristics

Width	2 in (5.2cm)
Long	100 ft (30.5 m)
Box presentation	10 pieces and individually

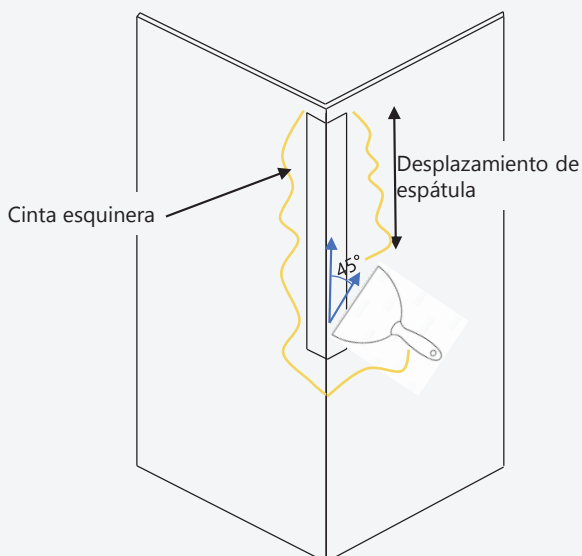

Instructions

- 1 Cut the piece of metal paper corner tape of the required length and fold the center along the tape with the metal strips towards the inside of the corner.
- 2 Apply a 2 inch wide layer of joint compound to each side of the corner on the substrate, then adjust the tape over the composite.
- 3 Apply pressure on the tape to adhere it to the joint compound by sliding the fingers on the surface, with a movement from top to bottom.
- 4 With the help of a joint knife, the excess compound is removed, resting firmly on the tape at a 45 angle to facilitate the exit of the compound.



Advantage

- Paper made with virgin and cross linked fibers that provide maximum strength.
- Galvanized strips for greater resistance to corrosion.
- Excellent handling after cutting, for a simple application.
- Micro perforations for better adhesion.

Application tools

6 inches Stainless Steel Joint Knife, Straight Cut Snips, 12 in Stainless Steel Mud Pan,

Presentation

1 piece box with 100 ft.

Precautions

Wear long sleeved work clothes, glasses and gloves when handling the tape; The cuts of this product can generate sharp edges. When finished, store the tape in its original box.

Storage

Store the product in a dry and cool place.

Warranty

Panel Rey México, S A retains the power to exercise modifications to the information in this document without prior notice. It is not possible to consider all the regulations related to the product, therefore, the user must take these rules into account. All claims must be in writing and supported with evidence; They must be sent within a period not exceeding 30 calendar days from the date on which the defect was discovered or should have been discovered and must be within the warranty period of the product. The client must not alter or repair the affected area until Panel Rey has reviewed the problem and determines a possible cause. The responsibility of Panel Rey México, SA is limited only to the replacement of the defective material and is not responsible for incidental or direct, indirect or indirect damages, nor for any loss caused by the application of these products that is not in accordance with the instructions or with the intended use, as well as the application of the product after the expiration date.

For more information:

Customer service USA:

1 800 862 90 22

Phone:

+52 (81) 8345-0055

E-mail:

contact.us@gpromax.com

Web Site

www.panelrey.com

Panel Rey S.A.
Serafín Peña 938 Sur Col Centro
C.P. 64000 Monterrey, N.L.

PANEL REY®
Drywall Solutions